


BASEMENT WINDOW SASH REMOVAL INSTRUCTIONS

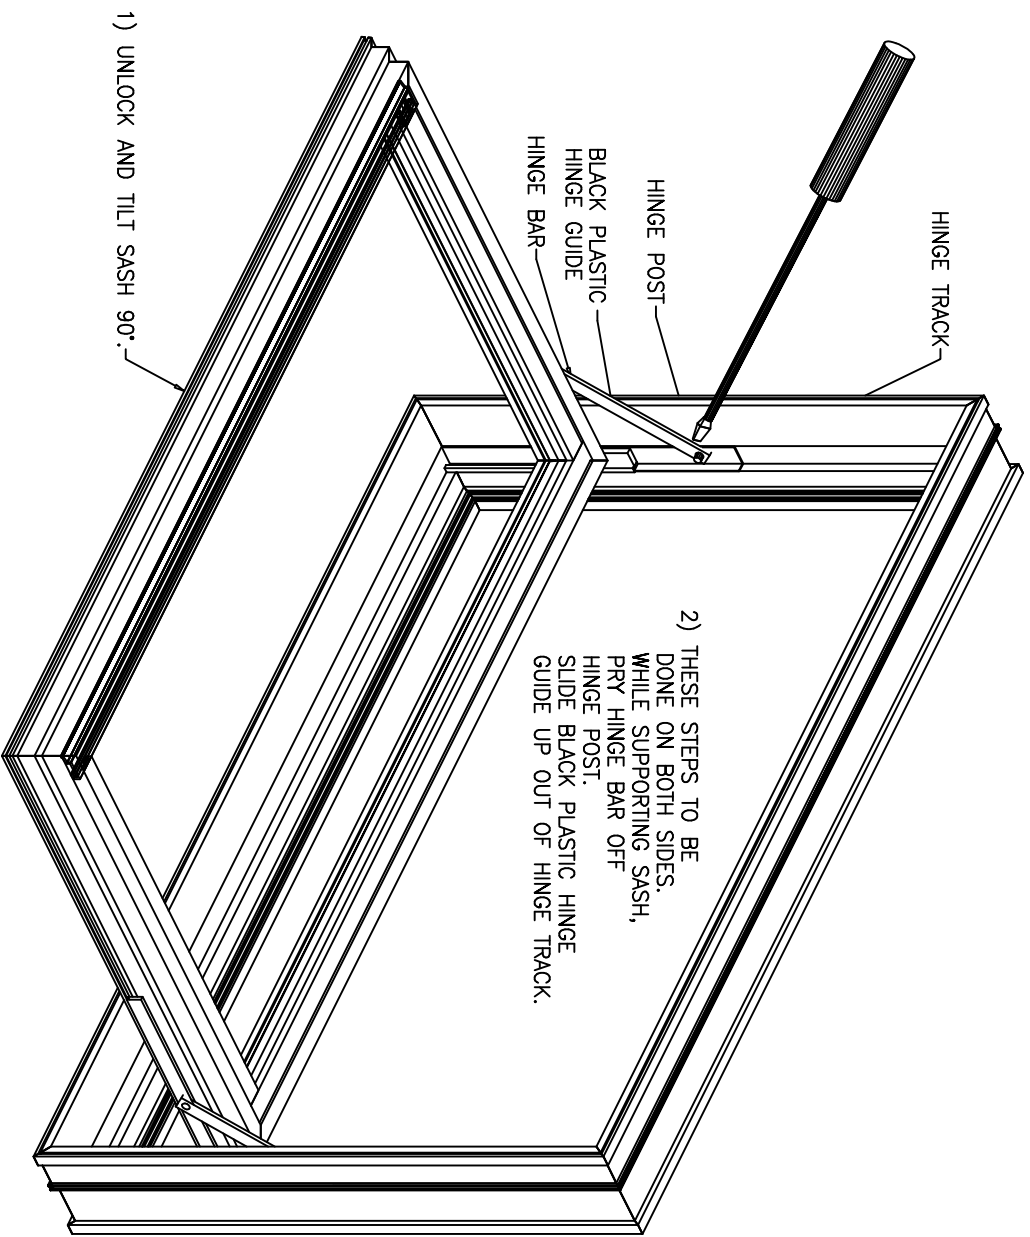

- TO REPLACE SASH:
- 1) SLIDE BLACK PLASTIC HINGE GUIDES INTO HINGE TRACK.
 - 2) SNAP HINGE BARS BACK ONTO HINGE POST – SOME FORCE WILL BE NECESSARY.
 - 3) CLOSE SASH.
 - 4) LOCK WINDOW.